


**DS115DCW76 | ULTRA HIGH TACK DOUBLE COATED ACRYLIC TAPE | FILM TAPE**

**DS115DCW76 is a 1 mil PET supported double coated high tack acrylic tape totaling 4 mils.**

- FEATURES & BENEFITS**
- **Very high immediate bond strength**
  - **Water clear**
  - **Adheres well to irregular surfaces**
  - **Good UV and aging characteristics**

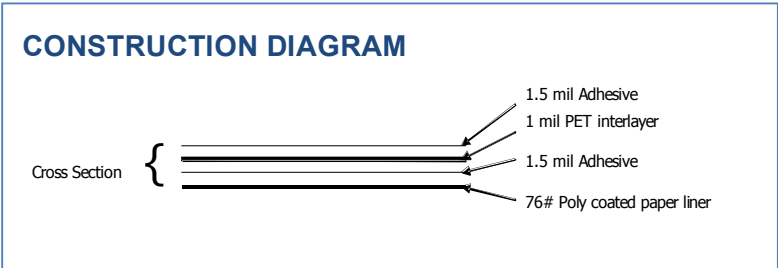

- TYPICAL APPLICATIONS**
- Plastic extrusions
  - POP Data Strips
  - Wire raceways
  - Signage
  - Displays

**CONSTRUCTION**

<b>5.5 mil 76# Poly coated white paper liner</b>
<b>1.5 mil acrylic adhesive</b>
<b>1 mil PET</b>
<b>1.5 mil acrylic adhesive</b>

**PERFORMANCE**

<b>180° degree Peel Adhesion Initial to S.S. (20 min @ RT)</b>	90 oz/in
<b>180° degree Peel Adhesion Ultimate to S.S. (1 week @ 70°C)</b>	170 oz/in
<b>Static Shear: 2.2 psi (1 x 1 x 1000g @RT)</b>	>500 minutes
<b>Application Temperature Range:</b>	65°F to 120°F (-18°C to 49°C)
<b>General Service Temperature Range:</b>	-20°F to 212°F (-29°C to 100°C)

Our products are supplied on a variety of release liners, from our standard 60# white paper liner, to polypropylene film liners in blue and white. The final application will determine the best liner base and release coating to use. Please contact our sales staff for any assistance.

**IMPORTANT NOTICE TO PURCHASER:** All statements, technical information and recommendations contained herein are based on tests we believe to be reliable, but the accuracy or completeness thereof is not guaranteed, and the following is made in lieu of all warranties, expressed or implied: Seller's and manufacturer's only obligation shall be to replace such quantity of the product proved to be defective. Neither seller nor manufacturer shall be liable for any injury, loss, or damage, direct or consequential, arising out of the use of or the inability to use the product. Before using, user shall determine the suitability of the product for his or her intended use, and the user assumes all risk and liability whatsoever in connection therewith. No representative of ours has authority to waive or change the foregoing provisions, but, subject to such provisions, our engineers are available to assist purchasers in adapting our products to the needs and circumstances prevailing in their business. **ISO 9001 Registered Company.**

©2009 Adhesive Applications, Inc.