


**DEV-501-3.0-2SL | CLEAR ACRYLIC ADHESIVE PROTECTIVE FILM | FILM TAPE**

The DEV-501-3.0-2SL is a lined single-coated transparent polyester film coated with a clear, premium grade, controlled low tack acrylic adhesive system. The protective film removes easily and leaves no adhesive residue. Exhibits excellent non-yellowing and UV properties.

**FEATURES & BENEFITS**

- Non yellowing, acid free
- No residue upon removal
- Good UV properties
- Excellent chemical resistance

**CONSTRUCTION DIAGRAM**

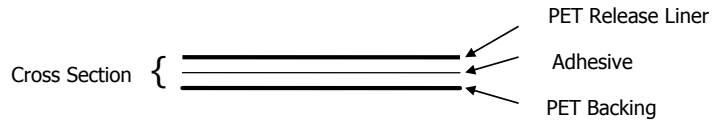

**TYPICAL APPLICATIONS**

- Die cutting
- Protects panels during fabrication & installation
- Clear protective mask

**CONSTRUCTION**

<b>3 mil PET backing</b>
<b>3/4 mil acrylic adhesive</b>
<b>2 mil clear PET liner</b>
<b>Clear</b>

**PERFORMANCE**

<b>Adhesion to steel:</b> 90 pl SS 15 min	7 oz./inch
<b>Adhesion to steel:</b> 90 pl SS 24 hr	7 oz./inch
<b>Adhesion to steel:</b> 90 pl SS 7 day	8 oz./inch
<b>Adhesion to steel:</b> Applied to SS for 48 hrs at 48 C	10 oz/inch

Sharp tooling must be used in die cutting to avoid edge nicks which would tear upon removal. Adhesion level is consistent on a given material, but will vary on different substrates and surface finishes.

**IMPORTANT NOTICE TO PURCHASER:** All statements, technical information and recommendations contained herein are based on tests we believe to be reliable, but the accuracy or completeness thereof is not guaranteed, and the following is made in lieu of all warranties, expressed or implied: Seller's and manufacturer's only obligation shall be to replace such quantity of the product proved to be defective. Neither seller nor manufacturer shall be liable for any injury, loss, or damage, direct or consequential, arising out of the use of or the inability to use the product. Before using, user shall determine the suitability of the product for his or her intended use, and the user assumes all risk and liability whatsoever in connection therewith. No representative of ours has authority to waive or change the foregoing provisions, but, subject to such provisions, our engineers are available to assist purchasers in adapting our products to the needs and circumstances prevailing in their business. **ISO 9001 Registered Company.**