


NT 8512-2DPDL | GREEN DOUBLE COATED SILICONE ADHESIVE TAPE | FILM TAPE

NT 8512-2DPDL silicone double-coated tape is designed for high performance applications requiring chemical resistance and excellent bond strength. The two layers of cured silicone pressure sensitive adhesive are protected by two fluorosilicone coated polyester liners. The highly cross-linked adhesives are well anchored to the polyester film interlayer to eliminate squeeze-out and/or legging.

FEATURES & BENEFITS

- Fine line definition
- Clean removal / No adhesive residue
- Chemical and Abrasion resistant

CONSTRUCTION DIAGRAM

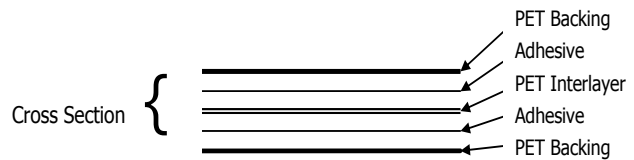

TYPICAL APPLICATIONS

- Die cut applications
- Splicing

CONSTRUCTION

2 mil PET backing
1.5 mil cross-linked green silicone adhesive
2 mil PET interlayer
1.5 mil cross-linked green silicone adhesive
2 mil PET backing

PERFORMANCE

Adhesion to steel: oz./inch (kg/cm)	35 (.39)
Temperature Range:	-60°F to 350°F (-51°C to 177°C)

IMPORTANT NOTICE TO PURCHASER: All statements, technical information and recommendations contained herein are based on tests we believe to be reliable, but the accuracy or completeness thereof is not guaranteed, and the following is made in lieu of all warranties, expressed or implied: Seller's and manufacturer's only obligation shall be to replace such quantity of the product proved to be defective. Neither seller nor manufacturer shall be liable for any injury, loss, or damage, direct or consequential, arising out of the use of or the inability to use the product. Before using, user shall determine the suitability of the product for his or her intended use, and the user assumes all risk and liability whatsoever in connection therewith. No representative of ours has authority to waive or change the foregoing provisions, but, subject to such provisions, our engineers are available to assist purchasers in adapting our products to the needs and circumstances prevailing in their business. **ISO 9001 Registered Company.**