


**9494BZ | 3/32" GRAY POLYETHYLENE DOUBLE COATED FOAM TAPE | FOAM TAPE**

**3/32 in. gray closed cell, cross linked polyethylene foam coated with acrylic one side and rubber adhesive. Easy release 4 mil poly liner.**

**FEATURES & BENEFITS**

- Very high bond strength
- High shear
- Adheres well to irregular surfaces
- Conformable
- Excellent UV and temperature resistance

**CONSTRUCTION DIAGRAM**

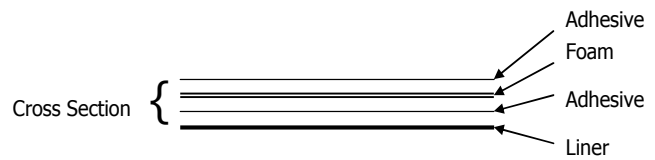

**TYPICAL APPLICATIONS**

- Window glazing

**CONSTRUCTION**

**PERFORMANCE**

Acrylic Adhesive
3/32" Cross-Linked Closed Cell PE Foam
Rubber Adhesive
Blue Poly Liner

Tensile Strength (psi) S252	35
Dynamic Shear (psi) S253	35
180° Peel (oz/in) PSTC-101	75
Static Shear S217 (PSTC-107*) *Modified	1 psi for 24+ hours
Probe Tack ASTM D-2979-01	950**

\*\* Tack numbers may not be exact value of tack as foam can tear during tack test. Please contact our sales staff for any assistance.

**IMPORTANT NOTICE TO PURCHASER:** All statements, technical information and recommendations contained herein are based on tests we believe to be reliable, but the accuracy or completeness thereof is not guaranteed, and the following is made in lieu of all warranties, expressed or implied: Seller's and manufacturer's only obligation shall be to replace such quantity of the product proved to be defective. Neither seller nor manufacturer shall be liable for any injury, loss, or damage, direct or consequential, arising out of the use of or the inability to use the product. Before using, user shall determine the suitability of the product for his or her intended use, and the user assumes all risk and liability whatsoever in connection therewith. No representative of ours has authority to waive or change the foregoing provisions, but, subject to such provisions, our engineers are available to assist purchasers in adapting our products to the needs and circumstances prevailing in their business. **ISO 9001 Registered Company.**

©2009 Adhesive Applications, Inc.