


NT 533 HADC | RUBBER /HEAT ACTIVATED ADHESIVE/ DOUBLE COATED ADHESIVE TAPE |

NT-533 HADC is a double-coated / single-linered polyester tape with a rubber pressure sensitive adhesive on one side and an heat-activated adhesive on the other.

FEATURES & BENEFITS

- **Thermoplastic heat activated adhesive activates at 125F and above.**
- **General Purpose Rubber PSA adheres to numerous substrates.**

CONSTRUCTION DIAGRAM

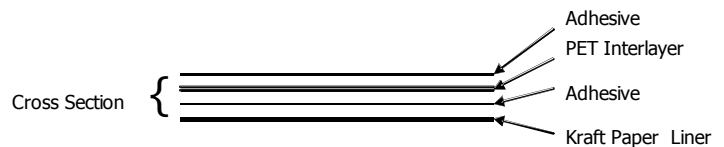

TYPICAL APPLICATIONS

- Die cutting
- Heat lamination to urethane parts.
- Urethane Bumper applications.

CONSTRUCTION

| |
|--|
| White 90# poly-coated kraft liner |
| 1.75 mil rubber adhesive |
| 0.5 mil PET |
| 0.6 mil heat activated adhesive |
| |

PERFORMANCE

| | |
|---|----------------|
| Adhesion to steel – Rubber 180° Peel 10 min dwell | 85 oz/inch |
| Adhesion to steel – Rubber 180° Peel 72 hour dwell | 120 oz/inch |
| Heat Activated Adhesive (activation pt) | 125F and above |

IMPORTANT NOTICE TO PURCHASER: All statements, technical information and recommendations contained herein are based on tests we believe to be reliable, but the accuracy or completeness thereof is not guaranteed, and the following is made in lieu of all warranties, expressed or implied: Seller's and manufacturer's only obligation shall be to replace such quantity of the product proved to be defective. Neither seller nor manufacturer shall be liable for any injury, loss, or damage, direct or consequential, arising out of the use of or the inability to use the product. Before using, user shall determine the suitability of the product for his or her intended use, and the user assumes all risk and liability whatsoever in connection therewith. No representative of ours has authority to waive or change the foregoing provisions, but, subject to such provisions, our engineers are available to assist purchasers in adapting our products to the needs and circumstances prevailing in their business. **ISO 9001 Registered Company.**

©2009 Adhesive Applications, Inc.