


**NT 9522SW | POLYSIL RELEASE COATED BLUE SILICONE ADHESIVE | FILM TAPE**

**PolySil™ NT 9522SW is a silicone functional splicing tape designed for high performance applications requiring heat resistance and excellent bond strength. The tape is selfwound and unwinds easily. The cross-linked silicone adhesive is well anchored to the polyester film interlayer to eliminate squeeze-out and / or legging.**

**FEATURES & BENEFITS**

- **Aggressive tacky adhesive**
- **Chemical and heat resistant**
- **Self wound (easy unwind)**

**CONSTRUCTION DIAGRAM**

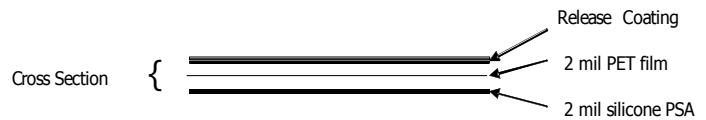

**TYPICAL APPLICATIONS**

- Die cut applications
- Splicing
- Functional splicing

**CONSTRUCTION**

<b>Release Coating</b>
<b>2 mil PET film</b>
<b>2 mil cross-linked blue silicone PSA</b>

**PERFORMANCE**

<b>Adhesion to steel: oz./inch (kg/cm)</b>	<b>&gt;30</b>
<b>Temperature Range:</b>	<b>-60°F to 350°F (-51°C to 177°C)</b>

**IMPORTANT NOTICE TO PURCHASER:** All statements, technical information and recommendations contained herein are based on tests we believe to be reliable, but the accuracy or completeness thereof is not guaranteed, and the following is made in lieu of all warranties, expressed or implied: Seller's and manufacturer's only obligation shall be to replace such quantity of the product proved to be defective. Neither seller nor manufacturer shall be liable for any injury, loss, or damage, direct or consequential, arising out of the use of or the inability to use the product. Before using, user shall determine the suitability of the product for his or her intended use, and the user assumes all risk and liability whatsoever in connection therewith. No representative of ours has authority to waive or change the foregoing provisions, but, subject to such provisions, our engineers are available to assist purchasers in adapting our products to the needs and circumstances prevailing in their business. **ISO 9001 Registered Company.**