


DS1511DCAPR | PERMANENT REMOVABLE DOUBLE COATED ACRYLIC TAPE | FILM TAPE

DS1511DCAPR is a 1 mil PET supported double coated high tack acrylic tape. Total thickness without liner of 3.5 mils.

- FEATURES & BENEFITS**
- **Very high tack permanent acrylic PSA**
 - **Moderate peel removable adhesive**
 - **Adheres well to irregular surfaces**
 - **Good UV and aging characteristics**

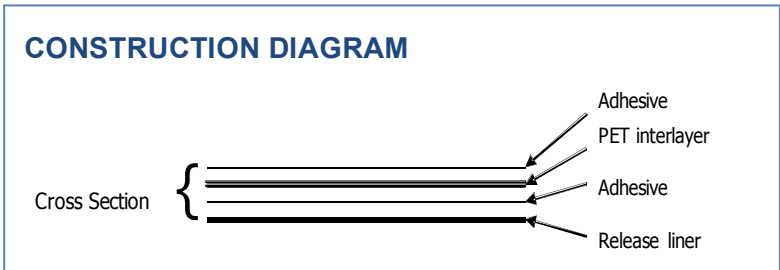

- TYPICAL APPLICATIONS**
- Plastic extrusions
 - POP Data Strips
 - Temporary Mounting
 - Displays

CONSTRUCTION

2 mil PET film release liner
1.0 mil removable acrylic adhesive
1 mil PET
1.5 mil aggressive permanent acrylic adhesive

PERFORMANCE

180° degree Peel Adhesion Initial to S.S. (20 min @ RT)	Permanent 60 oz/inch Removable 10 oz/inch
180° degree Peel Adhesion to S.S. (72H dwell)	Permanent 90 oz/inch Removable 25 oz/inch
Static Shear: 1.1 PSI (1 x 1 x 1000g @RT)	>500 minutes
Application Temperature Range:	65°F to 120°F (-18°C to 49°C)
General Service Temperature Range:	-20°F to 212°F (-29°C to 100°C)

Our products are supplied on a variety of release liners, from our standard 60# white paper liner, to polypropylene film liners in blue and white. The final application will determine the best liner base and release coating to use. Please contact our sales staff for any assistance.

IMPORTANT NOTICE TO PURCHASER: All statements, technical information and recommendations contained herein are based on tests we believe to be reliable, but the accuracy or completeness thereof is not guaranteed, and the following is made in lieu of all warranties, expressed or implied: Seller's and manufacturer's only obligation shall be to replace such quantity of the product proved to be defective. Neither seller nor manufacturer shall be liable for any injury, loss, or damage, direct or consequential, arising out of the use of or the inability to use the product. Before using, user shall determine the suitability of the product for his or her intended use, and the user assumes all risk and liability whatsoever in connection therewith. No representative of ours has authority to waive or change the foregoing provisions, but, subject to such provisions, our engineers are available to assist purchasers in adapting our products to the needs and circumstances prevailing in their business. **ISO 9001 Registered Company.**